


JOST

Heavy Duty Fifth Wheels

Robust heavy duty fifth wheel couplings

- Highway and off-road applications
- 3½" (90mm) and 2" (50mm)
- 170 - 400 kN options

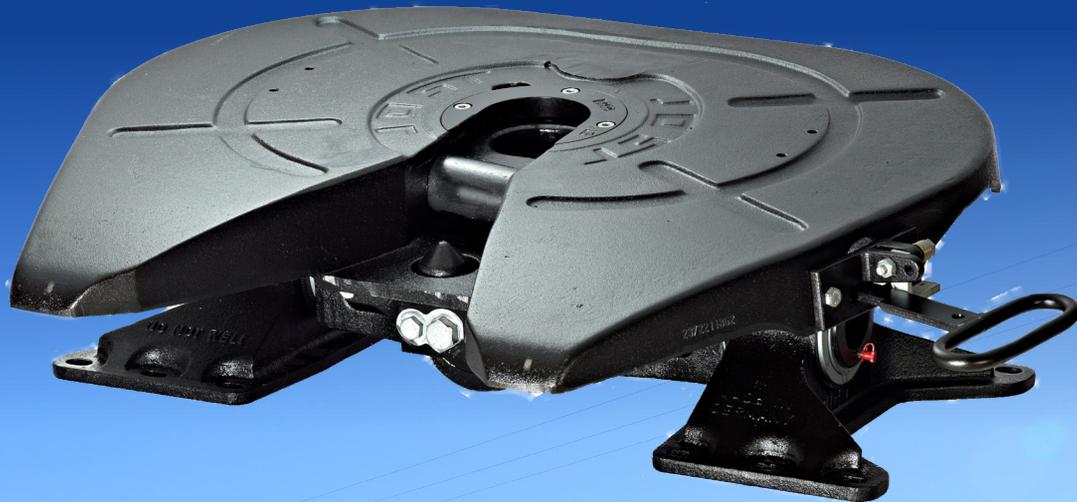

JOST New Zealand Ltd | www.jostnz.co.nz | Ph 0800 567 869 | sales@jostnz.co.nz

Member of JOST World



Model options

JSK38C

- Interchangeable between 2" or 3½" options
- Pedestals with shock-absorbing rubber cushion
- Available in three height options, 160mm and 190mm bolt/weld on or 250mm bolt on pedestals
- D value = 260kN (3½") and 216 kN (2")
- Imposed load = 36t (3½") and 28t (2")
- Weight 265kg



JSK38G

- Dual oscillating heavy duty fifth wheel coupling
- The carden bearing allows the semi trailer to be used off road without distortion
- Interchangeable between 2" and 3½" options
- D value = 260kN (3½") and 216kN (2")
- Imposed load = 36t (3½") and 28t (2")
- Weight 265kg



JSK50

- Heavy duty fifth wheel coupling for extreme applications
- For 3½" king pins
- D value = 300kN
- Imposed load 50t
- Weight 290kg



JSK52

- Super heavy duty fifth wheel coupling for extreme applications
- For 3½" king pins
- D value = 400kN
- Imposed load 74t
- Weight 455kg

