

JOST Fifth Wheel

JOST

JSK 37

The “industry standard” available in a wide range of configurations


- Available in cushion and pin type foot mounting
- Standard versions or eco-friendly low maintenance top plate
- Secondary locking mechanism with visual safety latch
- Volume loading and road train rated
- Option available of extended handle and latch cord for ease of operation
- Various mounting heights available
- Sensor unit available for the JSK37CZ & JSK37CW models
- Lubetronic unit supplied as standard for JSK 37CW and JSK37EW models



The JSK 37 Family...

Sensor Technology

Safe Coupling

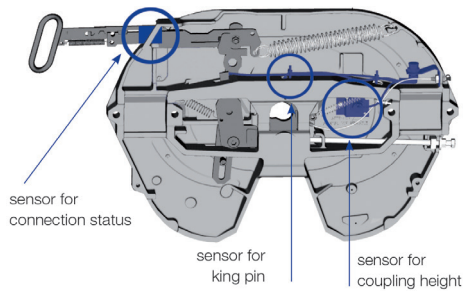

- The sensors are located in protected zones on non-moving parts
- Also suitable for use in the transport of dangerous goods
- A remote display processes the signal and displays it in the driver's cab
- Integrated dash display available (truck specific)
- Available in 12v and 24v



LubeTronic


Automatic lubrication



- LubeTronic is optional on JSK37 low maintenance model
- LubeTronic provides fully automatic lubrication of the lock jaw
- No lubrication necessary on the coupling plate thanks to low maintenance inserts
- Ideal for long distance routes and dedicated combinations
- Extended service intervals and reduced maintenance requirements

Pneumatic release


No more reaching

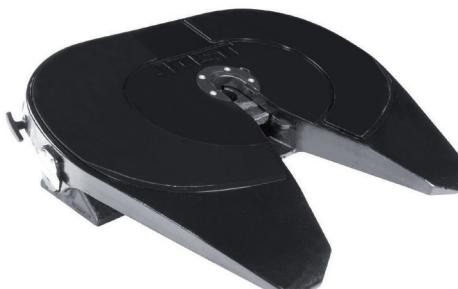

- Pneumatic release uncouple at the push of a button
- Keeps driver safe and avoids OH&S issues:
- Reduces manual effort required to uncouple the fifth wheel
- Available in standard and low maintenance

Heavy Duty

For extra load capacity

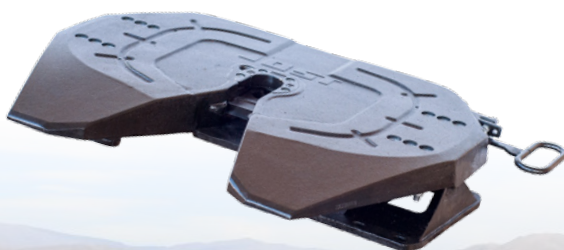

- Specifically designed to handle high combination weights
- Reinforced plate with extra webbing gussets on the underside
- Available in standard and low maintenance
- D value up to 240kN
- 24t imposed load