


JOST Fifth Wheel

JOST

Heavy duty Fifth Wheels
3½" (90mm) and 2" (50mm)

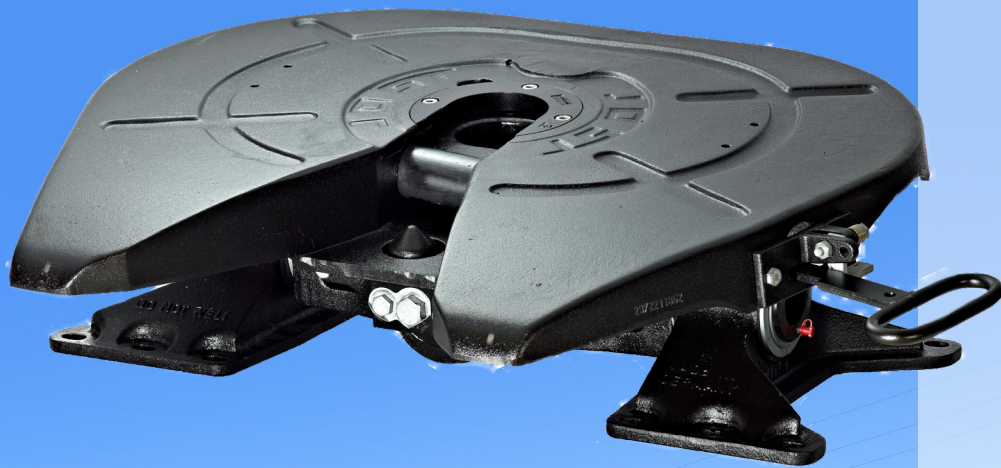

The JOST Heavy Duty Range...

JSK38C

Semi Oscillating 2" or 3½"

- Interchangeable between 2" or 3½" options
- Pedestals with shock-absorbing rubber cushion
- Available in three height options, 160mm and 190mm bolt on / weld on or 250mm bolt on pedestals
- D value = 260kN (3½") and 216 kN (2")
- Imposed load 36t



JSK38G

Fully Oscillating 2" or 3½"

- Dual oscillating heavy duty fifth wheel coupling
- The carden bearing allows the semi trailer to be used off road without distortion
- Interchangeable between 2" and 3½" options
- D value = 260kN (3½") and 216kN (2")
- Imposed load 36t



JSK50

Semi Oscillating 3½"

- Heavy duty fifth wheel coupling for extreme applications
- For 3½" king pins
- D value = 300kN
- Imposed load 50t

